




## Übersicht

### Abstreifer

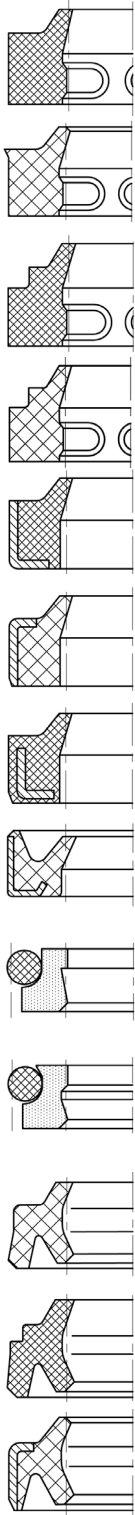

Bez.	Bau- gruppe	Bau- form	Profil- Nr.	Spezi- fikation	Aus- führung	WS	Härte Sh-A	Com- pound	max. Geschw. m/s	max. Druck MPa(bar)	Temp.- bereich °C	Seite
<b>AE 40</b>	A	E	40				NBR 90	3006	4		-40/+100	194
<b>AE 42</b>	A	E	42				TPU 90	3001	2		-40/+100	198
<b>AE 41</b>	A	E	41				NBR 90	3006	4		-40/+100	202
<b>AE 47</b>	A	E	47				TPU 90	3001	2		-40/+100	206
<b>AM 43</b>	A	M	43				NBR 90	3402	1		-40/+100	208
<b>AM 44</b>	A	M	44				TPU 95	3401	2		-40/+100	214
<b>AM 45</b>	A	M	45				NBR 90	3402	1		-40/+100	218
<b>AM 54</b>	A	M	54				TPU 95	3401	1		-40/+100	222
<b>AD 60</b>	A	D	60				PTFE 00	9807	15		-30/+100	226
<b>AD 61</b>	A	D	61				PTFE 00	9807	15		-30/+100	230
<b>AD 48</b>	A	D	48				TPU 95	3401	1		-40/+100	234
<b>AD 51</b>	A	D	51				NBR 90	3006	1		-40/+100	236
<b>ADM 55</b>	A	DM	55				TPU 95	3401	1		-40/+100	240